


Rev	Revisions	Rev.Drawn	Date
A		Du	25.11.2008

1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. SHELL A : BRASS
 - 1-4. SHELL B : BRASS
 - 1-5. NUT : BRASS
 - 1-6. O-RING :EPDM ; COLOR : BLACK
2. FINISH :
 - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
UNDER PLATE : NICKEL
 - 2-2. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
 - 2-3. WASHER: NICKEL PLATED 60u" ~ 100u" OVER ALL
 - 2-4. NUT : NICKEL PLATED 60u" ~ 100u" OVER ALL
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Voltage :125V
 - 3-3. Water proof: IPX7
4. Environmental :
 - 4-1. Operation Temperature : -20 ℃~85℃

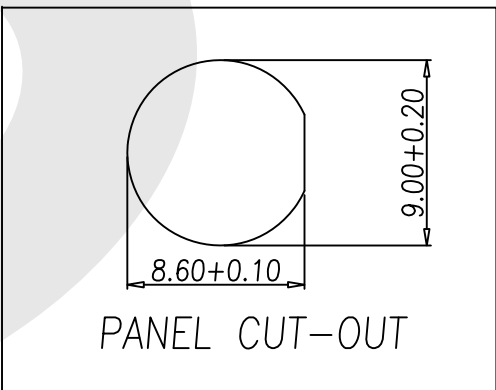

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:
		8M3P-B-E-FL-9x1.0-S-S-G10-B-N
Title: M8 MALE SOLDER TYPE FRONT LOCK for PANEL		
Drawn By: Storm.Li	SCALE: 1:1	SHEET: 1/1
Checked By: du	REV: A	DWG NO.: SST-081125-01
Approved By: Tony	Third angle Projection	TOLERANCE: X. ±2MM .X ±1MM .XX ±0.1MM .XXX±0.1MM
	General Dimension Tolerance	Units: mm