


Rev	Revisions	Rev.Drawn	Date
A		Du	10/01/11*

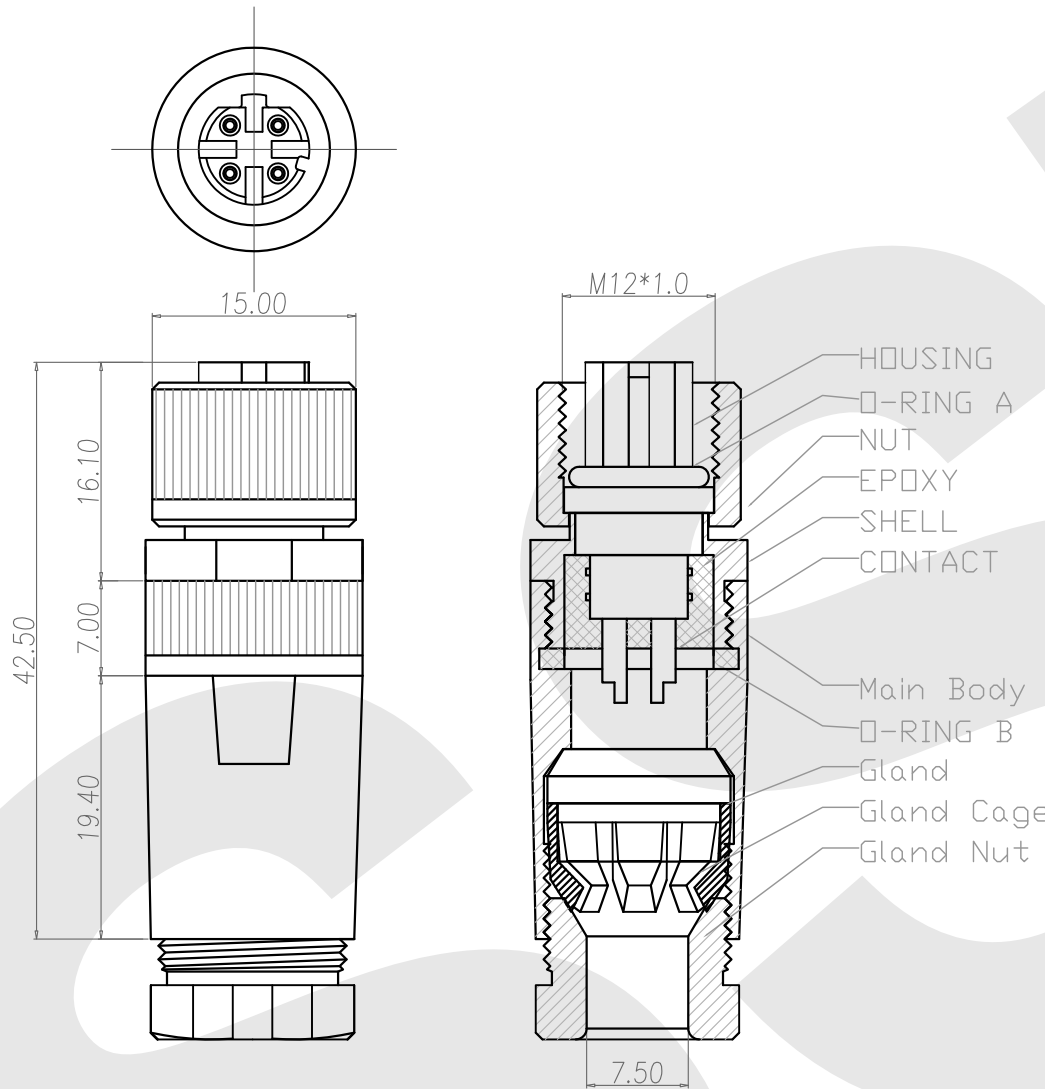

- 1. MATERIAL :**
- 1-1.
- a. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
  - b. CONTACT : BRASS
  - c. NUT : ALUMINUM ALLOY
  - d. SHELL : ALUMINUM ALLOY
  - e. O-RING A: EPDM ; COLOR : BLACK
  - f. Epoxy Base : EF400A&EF400B. COLOR : BLACK.
- 1-2. Main Body : ALUMINUM ALLOY  
 1-3. Gland : SILICONE COLOR : BLACK.  
 1-4. Gland Cage : POM ; COLOR : WHITE  
 1-5. Gland Nut : Brass.  
 1-6. O-RING B : SILICON : COLOR : BLACK
- 2. FINISH :**
- 2-1.
- a. CONTACT : GOLD FLASH MICRO INCHES MIN. UNDER PLATE : NICKEL.
  - b. NUT : SATING Ni PLATED.
  - c. SHELL : SATING Ni PLATED.
- 2-2. Main Body : SATING Ni PLATED.  
 2-3. Gland Nut : SATING Ni PLATED.
- 3. ELECTRICAL SPECIFICATION :**
- 3-1. Rated current : 5A  
 3-2. Rated Voltage : 125V  
 3-3. Water proof : IPX7
- 4. Environmental :**
- 4-1. Operation Temperature : -20 ℃~85℃

**SST SOUTH SEA TERMINAL CO.,LTD**

SGS Report No.:	Customer:	Part No.:			
	12F4P-W-D-M-2-GF-AA-SN-A				
Title: M12 FEMALE ASSEMBLING SOLDER TYPE for CABLE (D CODE)					
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE:
Checked By: du	1:1	1/1	A	/	.x ±0.20
Approved By: Tony	Thire angle Projection		General Dimesion Tolerance	Units	.xx ±0.10
	mm				.xxx ±0.05
				ANGULA ±1*	.xxxx ±0.03