


Rev	Revisions	Rev.Drawn	Date
A		Du	

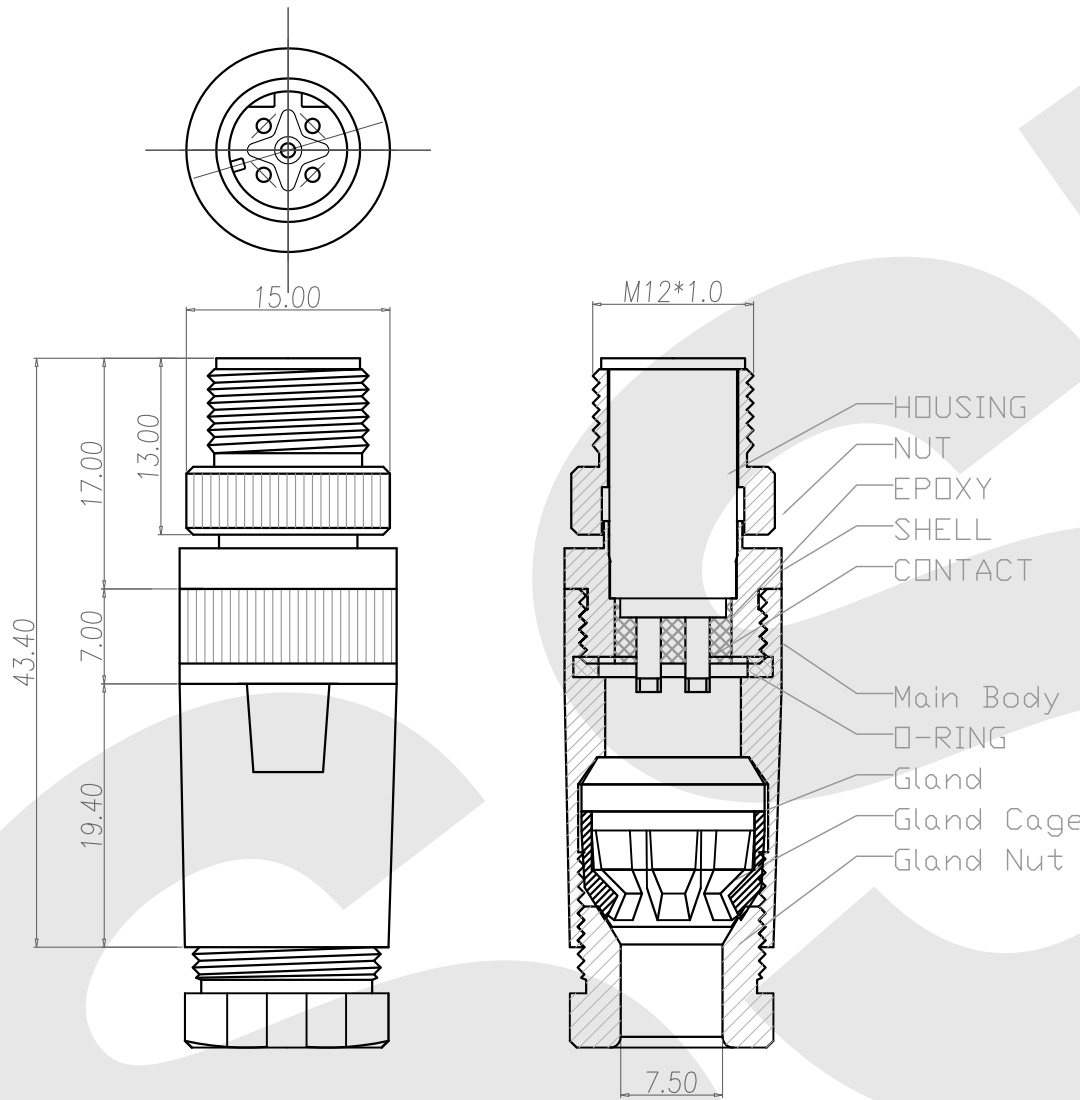

- 1. MATERIAL :**
- 1-1.
 - a. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
 - b. CONTACT : BRASS
 - c. NUT : ALUMINUM ALLOY
 - d. SHELL : ALUMINUM ALLOY
 - e. Epoxy Base : EF400A&EF400B. COLOR : BLACK.
 - 1-2. Main Body : ALUMINUM ALLOY
 - 1-3. Gland : SILICONE COLOR : BLACK.
 - 1-4. Gland Cage : POM ; COLOR : WHITE
 - 1-5. Gland Nut : ALUMINUM ALLOY.
 - 1-6. O-RING : SILICON ; COLOR : BLACK
- 2. FINISH :**
- 2-1.
 - a. CONTACT : GOLD FLASH MICRO INCHES MIN.
 - UNDER PLATE : NICKEL.
 - b. NUT : SATING Ni PLATED.
 - c. SHELL : SATING Ni PLATED.
 - 2-2. Main Body : SATING Ni PLATED.
 - 2-3. Gland Nut : SATING Ni PLATED.
- 3. ELECTRICAL SPECIFICATION :**
- 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 125V
 - 3-3. Water proof : IPX7
- 4. Environmental :**
- 4-1. Operation Temperature : -20 ℃~85℃

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:			
	12M4P-W-D-M-2-GF-AA-SN-A				
Title: M12 MALE ASSEMBLING SOLDER TYPE for CABLE (D CODE)					
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE:
Checked By: du	1:1	1/1	A	/	.x ±0.20
Approved By: Tony	Third angle Projection		Units	mm	.xx ±0.10
	General Dimension Tolerance				.xxx ±0.05
					.xxxx ±0.03
					ANGULA ±1*