


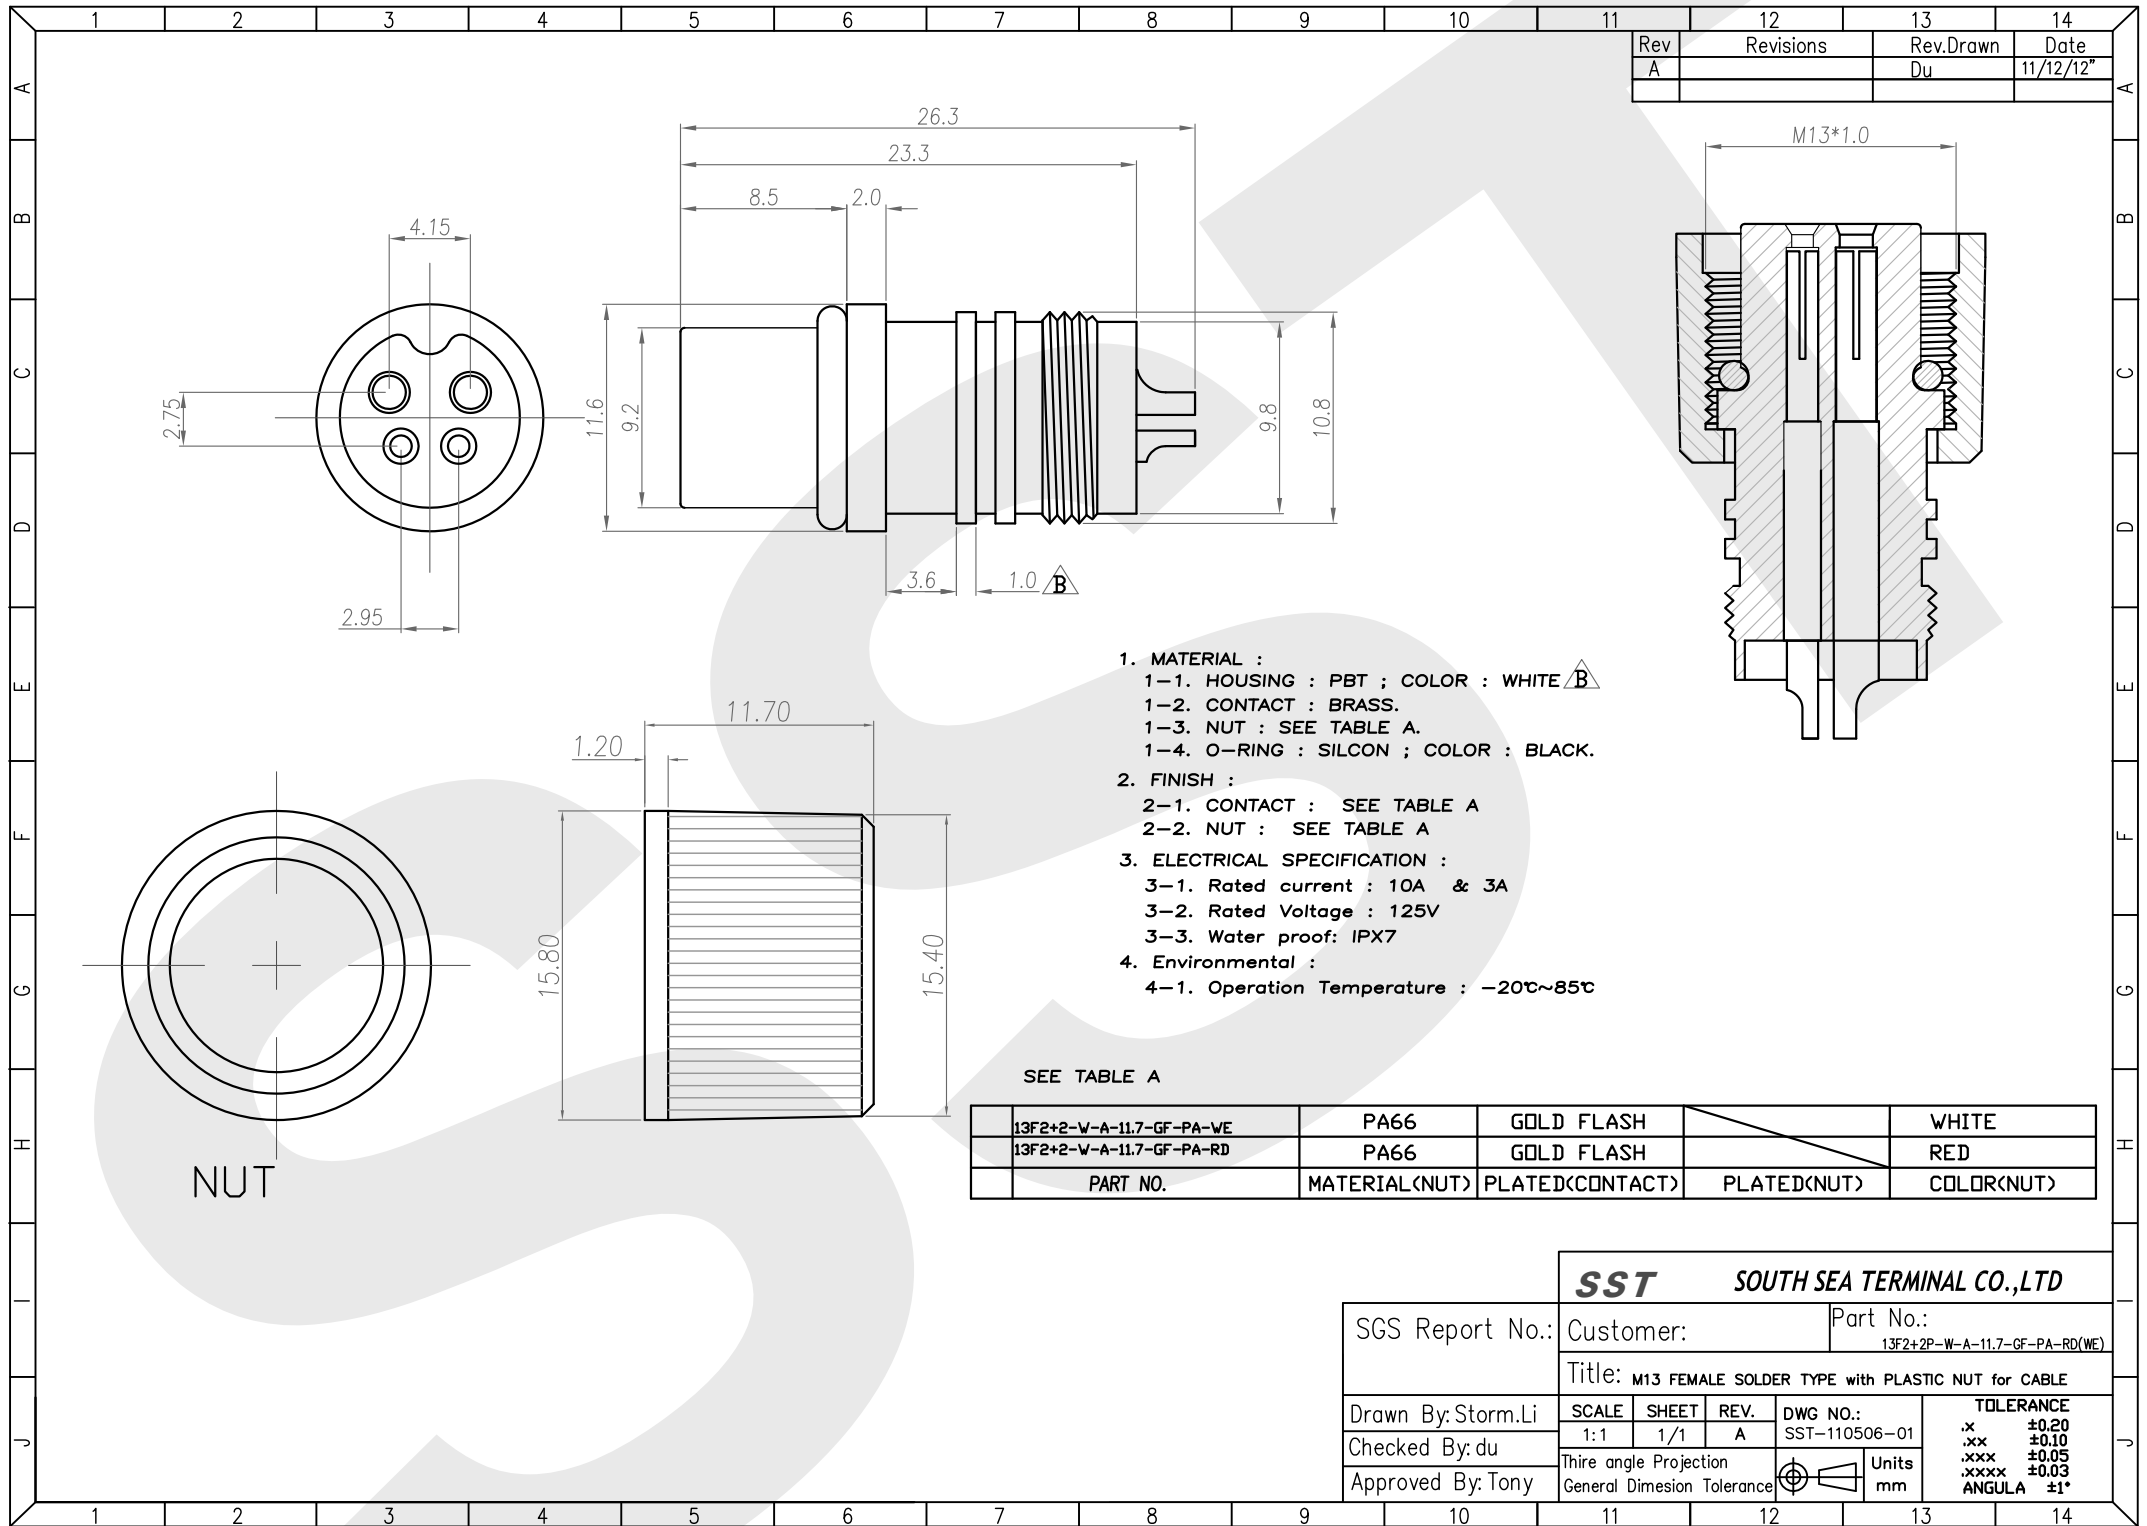

Rev	Revisions	Rev.Drawn	Date
A		Du	11/12/12"

1. MATERIAL :
1-1. HOUSING : PBT ; COLOR : WHITE $\triangle B$
1-2. CONTACT : BRASS.
1-3. NUT : SEE TABLE A.
1-4. O-RING : SILCON ; COLOR : BLACK.
2. FINISH :
2-1. CONTACT : SEE TABLE A
2-2. NUT : SEE TABLE A
3. ELECTRICAL SPECIFICATION :
3-1. Rated current : 10A & 3A
3-2. Rated Voltage : 125V
3-3. Water proof: IPX7
4. Environmental :
4-1. Operation Temperature : -20℃~85℃

SEE TABLE A

13F2+2-W-A-11.7-GF-PA-WE	PA66	GOLD FLASH		WHITE
13F2+2-W-A-11.7-GF-PA-RD	PA66	GOLD FLASH		RED
PART NO.	MATERIAL(NUT)	PLATED(CONTACT)	PLATED(NUT)	COLOR(NUT)

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.: Customer: Part No.: 13F2+2P-W-A-11.7-GF-PA-RD(WE)

Title: M13 FEMALE SOLDER TYPE with PLASTIC NUT for CABLE

Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE
Checked By: du	1:1	1/1	A	SST-110506-01	.x ±0.20
Approved By: Tony	Thire angle Projection	General Dimesion Tolerance		Units mm	.xx ±0.10
					.xxx ±0.05
					.xxxx ±0.03
					ANGULA ±1°