


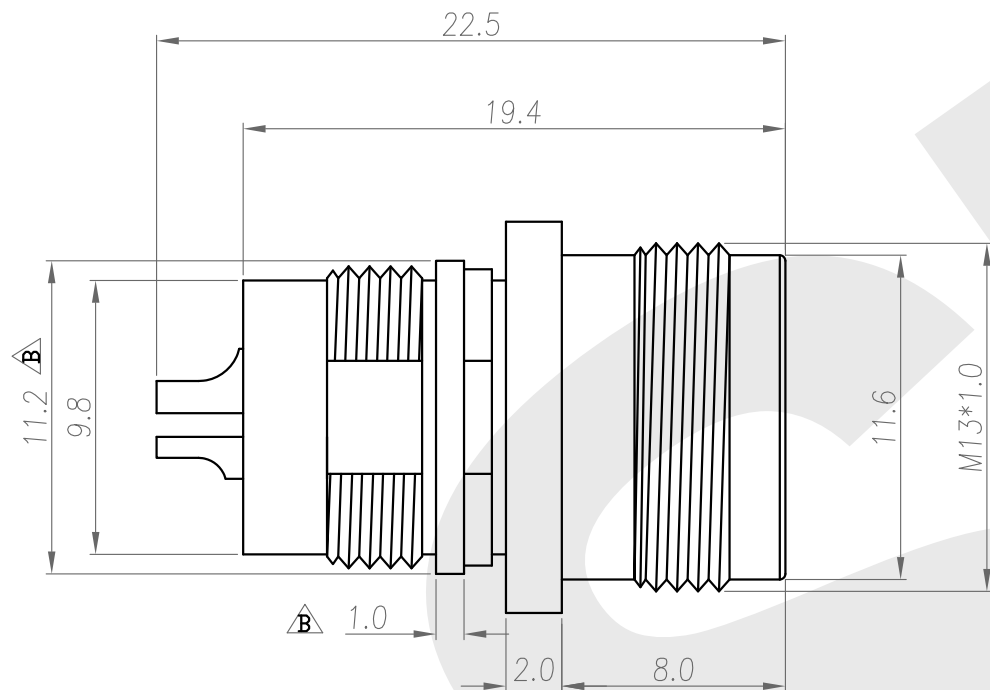

1. MATERIAL :
 - 1-1. HOUSING : PBT ; COLOR : WHITE
 - 1-2. CONTACT : BRASS.
2. FINISH :
 - 2-1. CONTACT : SEE TABLE A
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 10A & 3A
 - 3-2. Rated Voltage : 125V
 - 3-3. Water proof: IP67
4. Environmental :
 - 4-1. Operation Temperature : -20℃~85℃

TABLE A/表A

13M2+2P-W-A-GF-WE	GOLD FLASH
13M2+2P-W-A-N-WE	NICKEL PLATED
PART NO.	PLATED(CONTACT)

		<i>SST</i> <i>SOUTH SEA TERMINAL CO.,LTD</i>			
SGS Report No.:	Customer:			Part No.: 13M2+2P-W-A-GF(N)-WE	
	Title: M13 MALE SOLDER TYPE for CABLE				
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE
Checked By:du	1:1	1/1	A	SST-110506-01	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Approved By:Tony	Third angle Projection				Units mm
	General Dimension Tolerance				