


Rev	Revisions	Rev.Drawn	Date
A		Du	25/11/11"

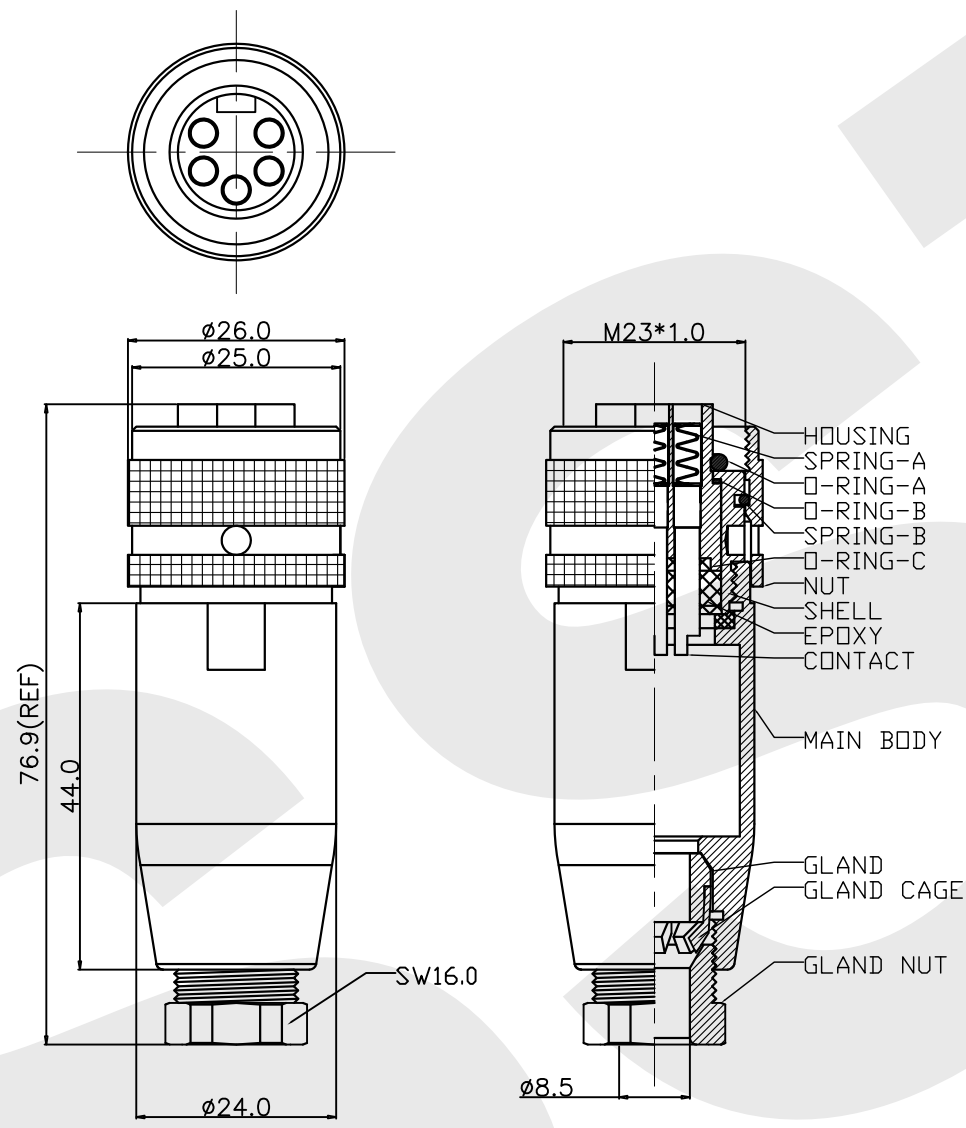

- 1. MATERIAL :**
- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
 - 1-2. SPRING-A : PHOSPHOR BRONZE.
 - 1-3. O-RING-A : EPDM ; COLOR : BLACK.
 - 1-4. O-RING-B : SILICONE ; COLOR : BLACK.
 - 1-5. SPRING-B : STAINLESS STEEL.
 - 1-6. O-RING-C : SILICONE ; COLOR : BLACK.
 - 1-7. NUT : BRASS.
 - 1-8. SHELL : BRASS.
 - 1-9. Epoxy Base : EF400A&EF400B. COLOR : BLACK.
 - 1-10. CONTACT : BRASS.
 - 1-11. MAIN BODY : ALUMINUM ALLOY.
 - 1-12. GLAND : SILICONE COLOR : BLACK.
 - 1-13. GLAND CAGE : POM ; COLOR : WHITE.
 - 1-14. GLAND NUT : ALUMINUM ALLOY.
- 2. FINISH :**
- 2-1. SPRING-A : MATTE TIN.
 - 2-2. NUT : SATING NICKEL PLATED OVER ALL
 - 2-3. SHELL : SATING NICKEL PLATED OVER ALL
 - 2-4. CONTACT : 30 MICRO INCHES MIN. GOLD PLATED.
 - 2-5. MAIN BODY : SATING NICKEL PLATED OVER ALL
 - 2-6. GLAND NUT : SATING NICKEL PLATED OVER ALL
- 3. ELECTRICAL SPECIFICATION :**
- 3-1. Rated current : 20A
 - 3-2. Rated oltage : 250V
 - 3-3. Water proof: IP67
- 4. Environmental :**
- 4-1. Operation Temperature : -40°C~85°C

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:			
	23F5P-W-A-M-2-GF-B-SN-A				
Title:M23 FEMALE ASSEMBLING SOLDER TYPE for CABLE					
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE: .x ±0.25 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Checked By:du	1:1	1/1	A	/	
Approved By:Tony	Third angle Projection		General Dimesion Tolerance		Units mm