


Rev	Revisions	Rev.Drawn	Date
A		Du	25.11.2008

1. MATERIAL :
  - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
  - 1-2. CONTACT : BRASS
  - 1-3. SHELL : BRASS
  - 1-4. NUT : BRASS
  - 1-5. Epoxy Base : EF400A&EF400B. COLOR : BLACK
  - 1-6. O-RING : NBR
2. FINISH :
  - 2-1. CONTACT : 30 MICRO INCHES MIN. GOLD PLATED  
UNDER PLATE : NICKEL
  - 2-2. SHELL : MATTE TIN PLATED
  - 2-3. NUT : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
  - 3-1. Rated current : 20A
  - 3-2. Voltage :125V
  - 3-3. Water proof: IPX8
4. Environmental :
  - 4-1. Operation Temperature : -20 ℃~85℃

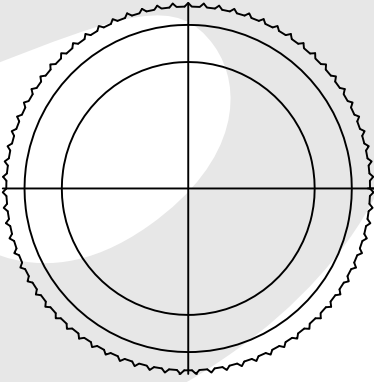

NUT

SGS Report No.:		Customer:		Part No.:	
				7/8F5P-W-A-11.3-P-2-G30-B-N	
Title: 7/8 FEMALE SOLDER TYPE for CABLE					
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:	TOLERANCE:
Checked By: du	1:1	1/1	A	SST-081125-01	X. ±2MM .X ±0.25MM .XX ±0.1MM .XXX±0.1MM
Approved By: Tony	Third angle Projection			Units mm	
	General Dimension Tolerance				