




Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

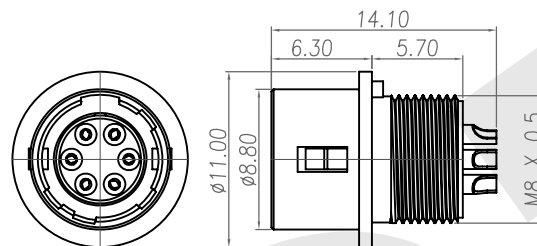

NUT

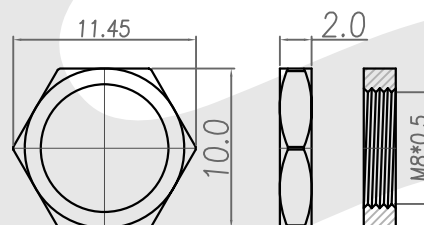

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-S	ST3A-08BR-05S-S	ST3A-08BR-06S-S	ST3A-08BR-07S-S

		SST SOUTH SEA TERMINAL CO.,LTD				
SGS Report No.:		Customer:			Part No.: ST3A-08BR-XXS-S	
		Title: P-P CONN. Panel/Case Receptacle Solder Type (F)				
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By: du	1:1	1/1	A	QC5665		.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03
Approved By:Tony	Thire angle Projection					Units mm
	General Dimenson Tolerance					
ANGULA ±1°						

SST

SOUTH SEA TERMINAL CO.,LTD