





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

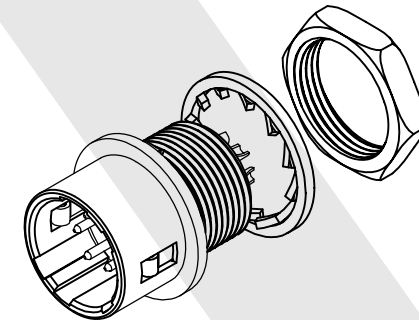

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series **ST3A-08BR-XXP-S**

Dimension of inner thread=M8

Poles: P: Plug, S: Female contact

P: Male contact, S: Female contact

WR: Wire Receptacle, BR: Panel / Case Receptacle

CONTACT ARRANGEMENT(FRONT VIEW)

ST3A-08BR-04P-S	ST3A-08BR-05P-S	ST3A-08BR-06P-S	ST3A-08BR-07P-S

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:
		ST3A-08BR-XXP-S
Title: P-P CONN. Panel/Case Receptacle Solder Type (M)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/1
Approved By: Tony	REV.	A
	DWG NO.:	QC5664
	Thire angle Projection	Units
	General Dimesion Tolerance	mm
	TOLERANCE:	
	.x	±0.20
	.xx	±0.10
	.xxx	±0.05
	.xxxx	±0.03
	ANGULA	±1°