




RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER

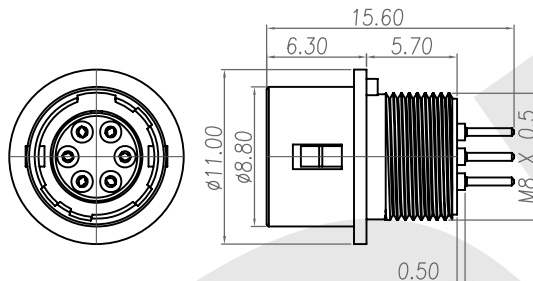

NUT

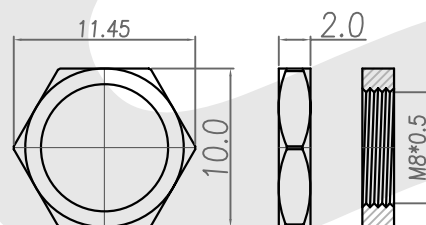

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXS-D

Dimension of inner thread=M8

Poles

P: Plug

WR: Wire Receptacle

BR: Panel / Case Receptacle

D: Dip type

S: Solder type

P: Male contact

S: Female contact




TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04S-D	ST3A-08BR-05S-D	ST3A-08BR-06S-D	ST3A-08BR-07S-D

SGS Report No.:

SST SOUTH SEA TERMINAL CO.,LTD

Customer:

Part No.:

ST3A-08BR-XXS-D

Title: P-P CONN. Panel/Case Receptacle Dip Type (F)

Drawn By: Storm.Li

Checked By: du

Approved By: Tony

SCALE

1:1

Thire angle Projection

SHEET

1/1

General Dimesion Tolerance

REV.

A

Units

DWG NO.:

QC5669

mm

TOLERANCE:

.x ±0.20

.xx ±0.10

.xxx ±0.05

.xxxx ±0.03

ANGULA ±1°