




Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012





RECOMMENDED MOUNTING HOLE
(Panel thickness 0.7~2)



WASHER



NUT

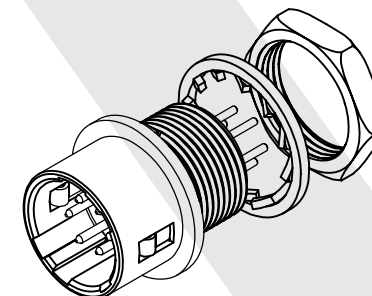

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL : ZINC ALLOY
- 1-4. SPRING : STAINLESS STEEL
- 1-5. WASHER : PHOSPHOR BRONZE
- 1-6. NUT : BRASS

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL : NICKEL
- 2-3. WASHER : NICKEL
- 2-4. NUT : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08BR-XXP-D D: Dip type
 Dimension of inner thread=M8 S: Solder type
 P: Plug P: Male contact
 S: Female contact
 Poles
 WR: Wire Receptacle
 BR: Panel / Case Receptacle

TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
ST3A-08BR-04P-D	ST3A-08BR-05P-D	ST3A-08BR-06P-D	ST3A-08BR-07P-D

SST							SOUTH SEA TERMINAL CO.,LTD		
SGS Report No.:		Customer:			Part No.:				
					ST3A-08BR-XXP-D				
		Title: P-P CONN. Panel / Case Receptacle Dip Type (M)							
Drawn By: Storm.Li		SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:		
Checked By: du		1:1	1/1	A	QC5668		.x ±0.20		
Approved By: Tony		Third angle Projection					Units		.xxx ±0.10
		General Dimesion Tolerance					mm	.xxxx ±0.03	
									ANGULA ±1°