







TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08P-04S-S	ST3A-08P-05S-S	ST3A-08P-06S-S	ST3A-08P-07S-S

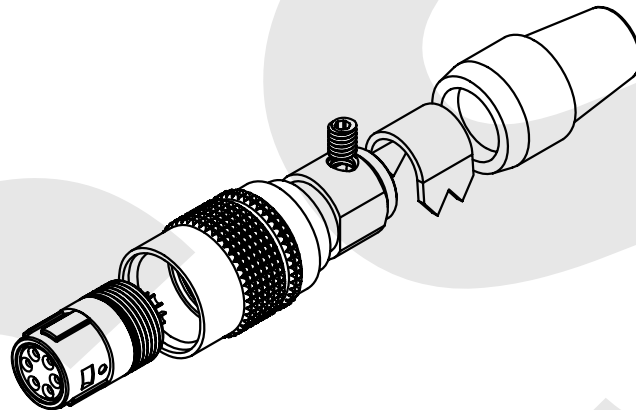

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08 P-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

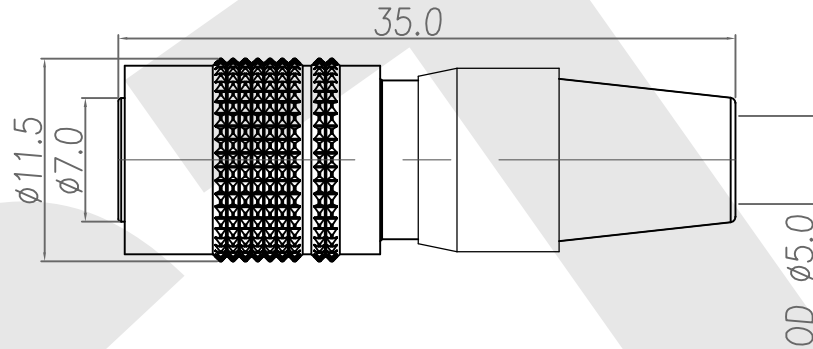

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SPRING : STAINLESS STEEL
- 1-7. SCREW : ALLOY STEEL
- 1-8. CLAMP : BRASS
- 1-9. SR : NBR ; COLOR : BLACK

2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : SATIN NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SPRING : NICKEL
- 2-6. SCREW : NICKEL

Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:
		ST3A-08P-XXS-S
Title: P-P CONN. Plug Solder Type (F)		
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/2
Approved By: Tony	REV.	A
DWG NO.: QC5663		TOLERANCE:
Third angle Projection		.x ±0.20
General Dimension Tolerance		.xx ±0.10
		.xxx ±0.05
		.xxxx ±0.03
		ANGULA ±1°

