





TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04S-S	ST3A-08WR-05S-S	ST3A-08WR-06S-S	ST3A-08WR-07S-S

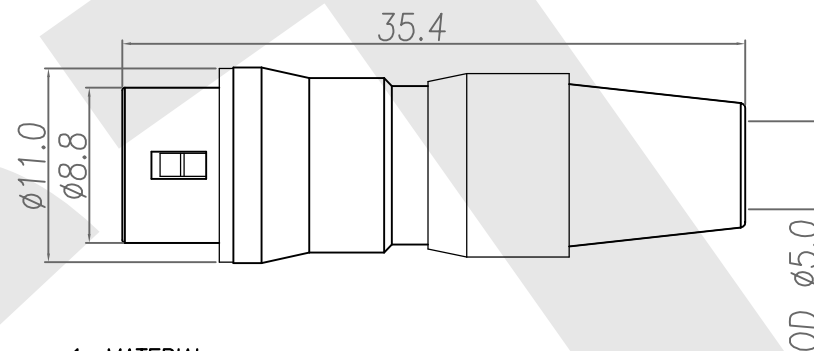

1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL

3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

Series ST3A-08WR-XXS-S D: Dip type
S: Solder type
Dimension of inner thread=M8 P: Male contact
S: Female contact
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

		SST SOUTH SEA TERMINAL CO.,LTD				
SGS Report No.:		Customer:			Part No.: ST3A-08WR-XXS-S	
		Title: P-P CONN. Wire Receptacle Solder Type (F)				
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Checked By:du	1:1	1/2	A	QC5667		
Approved By:Tony	Thire angle Projection					
	General Dimesion Tolerance					
				Units	mm	

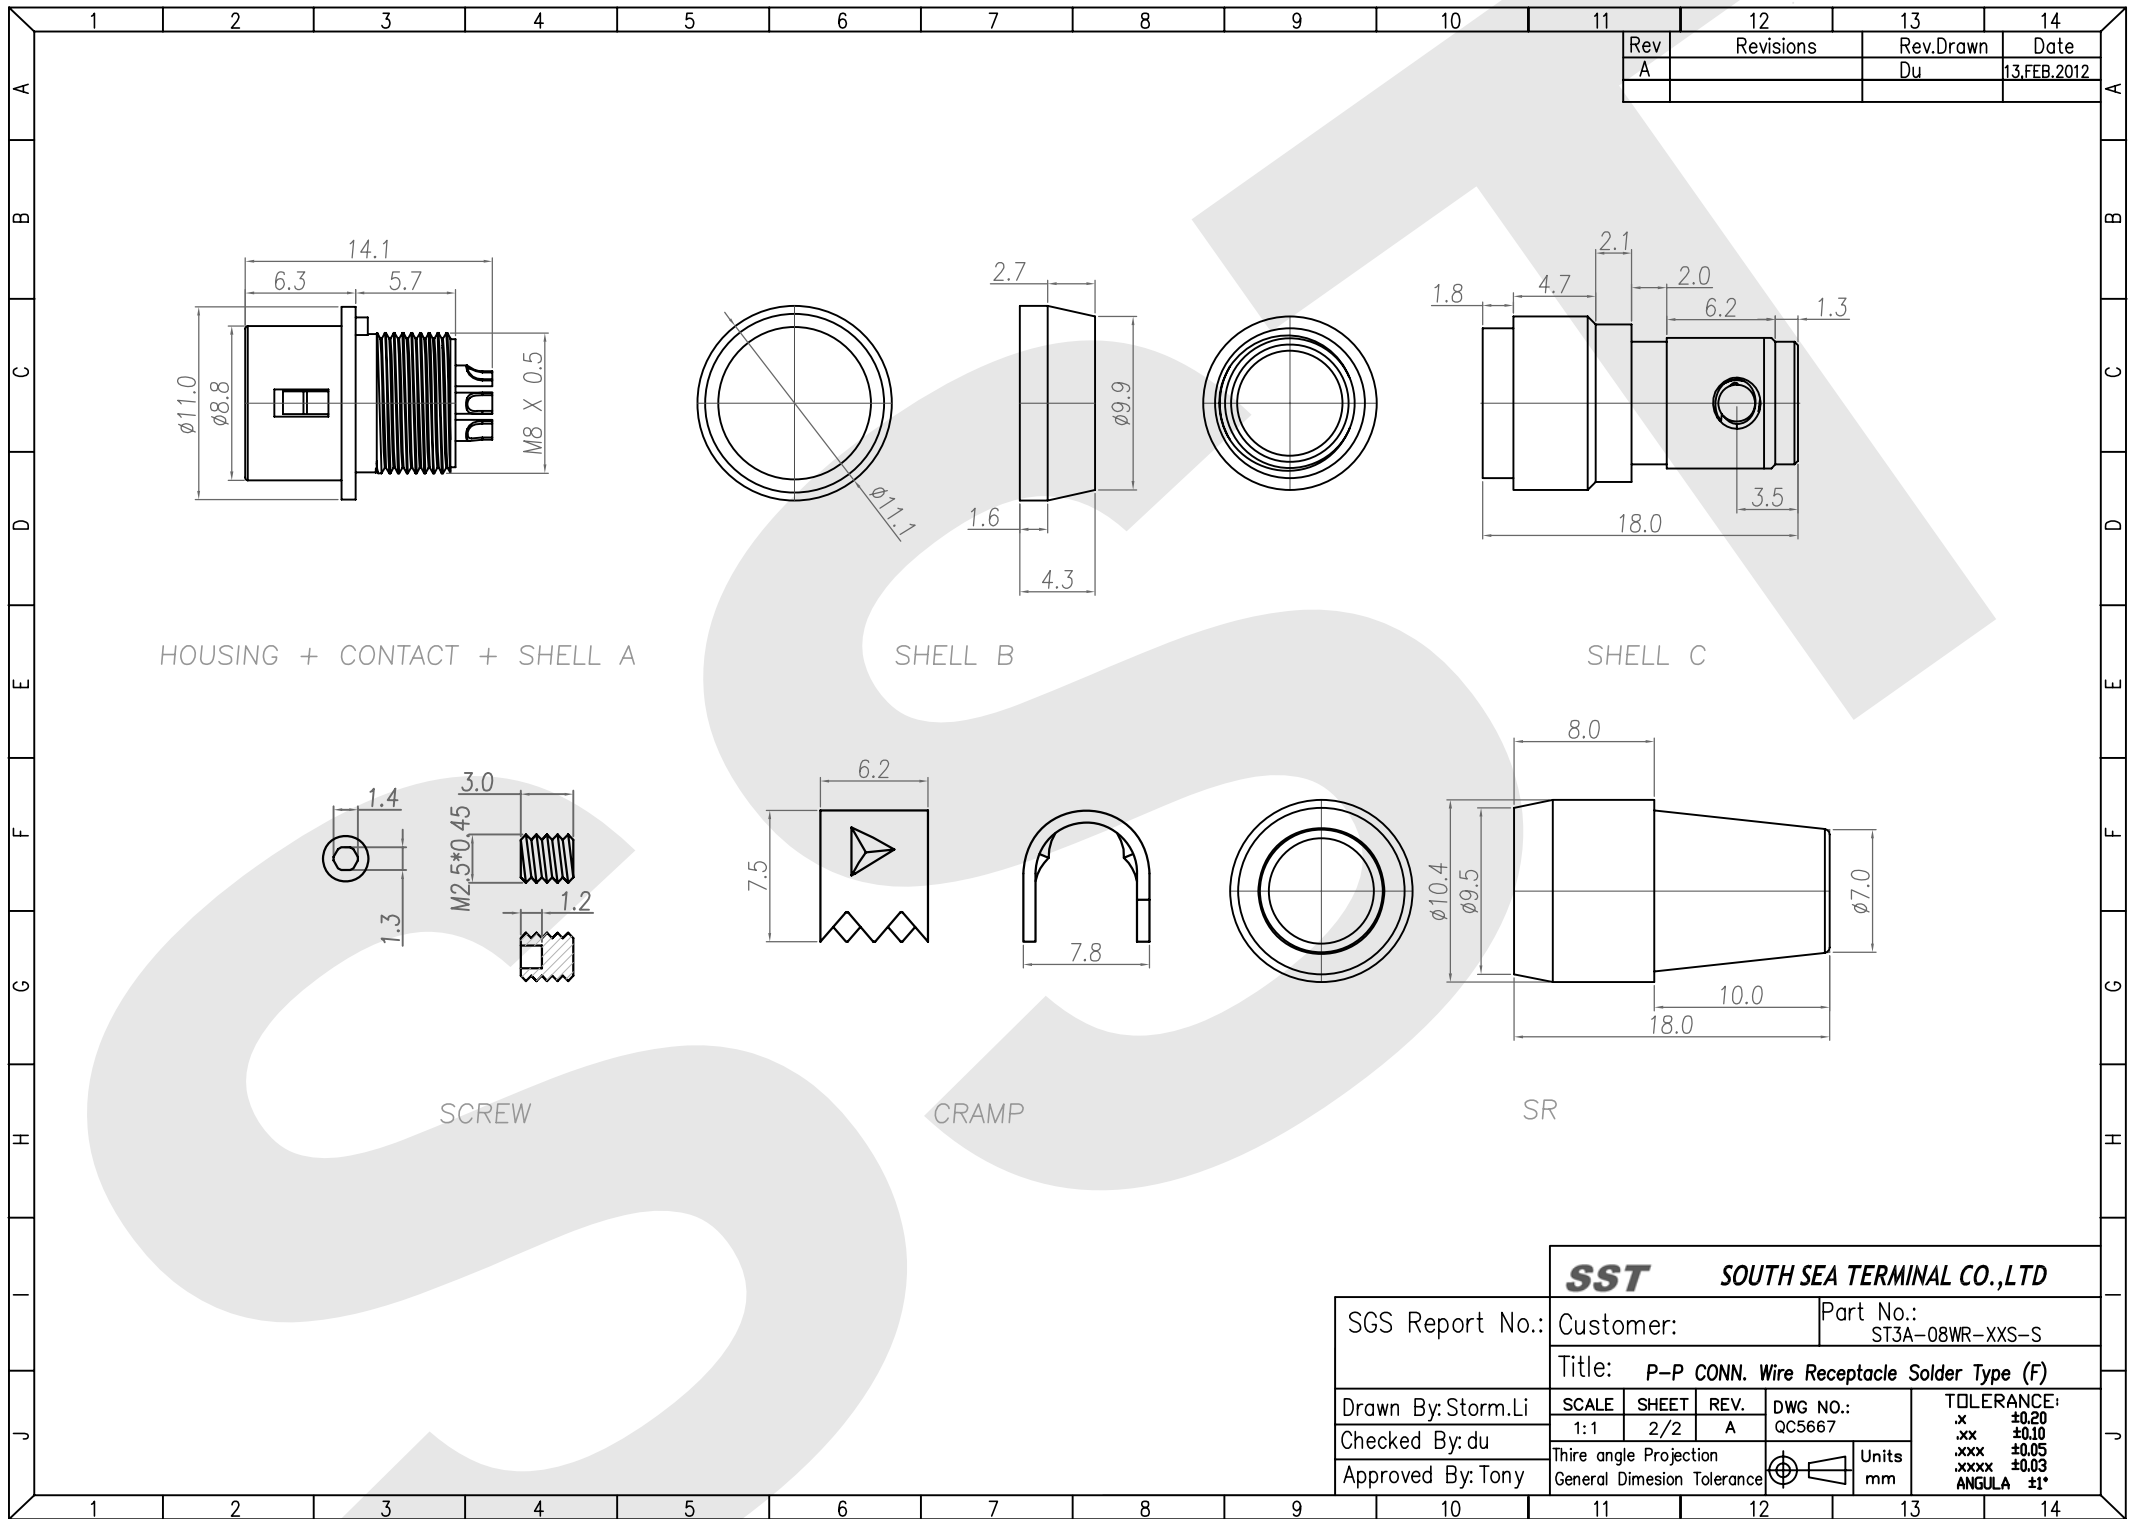

Rev	Revisions	Rev.Drawn	Date
A		Du	13.FEB.2012

SST										SOUTH SEA TERMINAL CO.,LTD										
SGS Report No.:					Customer:					Part No.:										
										ST3A-08WR-XXS-S										
Title: P-P CONN. Wire Receptacle Solder Type (F)																				
Drawn By:Storm.Li					SCALE		SHEET		REV.		DWG NO.:			TOLERANCE:						
Checked By:du					1:1		2/2		A		QC5667									
Approved By: Tony					Thire angle Projection								Units mm		.x ±0.20					
					General Dimesion Tolerance										.xxx ±0.10					