






TABLE A

CONTACT ARRANGEMENT(FRONT VIEW)			
			
ST3A-08WR-04P-S	ST3A-08WR-05P-S	ST3A-08WR-06P-S	ST3A-08WR-07P-S

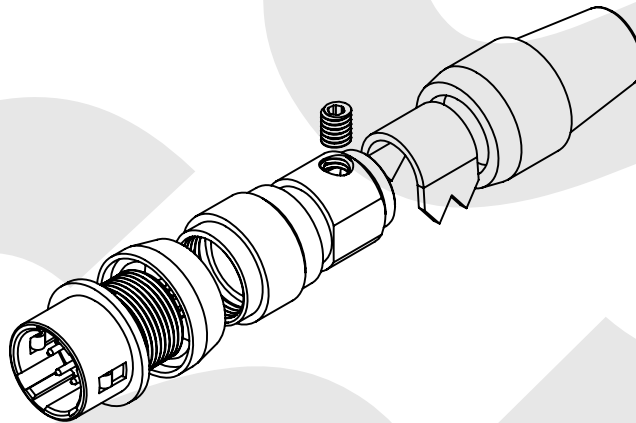


3. ORDERING INFORMATION : P-P(PUSH PULL) CONNECTOR

ST3A-08WR-XXP-S

Series ——— D: Dip type
S: Solder type

Dimension of inner ——— P: Male contact
thread=M8 ——— S: Female contact

——— Poles
P: Plug
WR: Wire Receptacle
BR: Panel / Case Receptacle

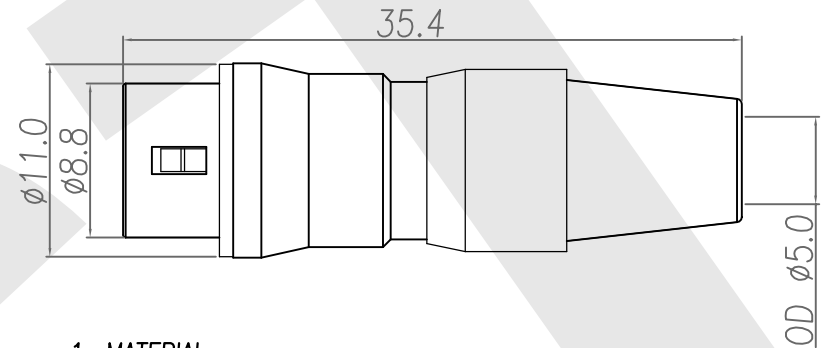


1. MATERIAL :

- 1-1. HOUSING : NYLON46 UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. SHELL A : ZINC ALLOY
- 1-4. SHELL B : BRASS
- 1-5. SHELL C : BRASS
- 1-6. SCREW : ALLOY STEEL
- 1-7. CLAMP : BRASS
- 1-8. SR : NBR ; COLOR : BLACK


2. FINISH :

- 2-1. CONTACT : GOLD FLASH
- 2-2. SHELL A : NICKEL
- 2-3. SHELL B : NICKEL
- 2-4. SHELL C : NICKEL
- 2-5. SCREW : NICKEL


SST SOUTH SEA TERMINAL CO.,LTD						
SGS Report No.:		Customer:			Part No.:	
					ST3A-08WR-XXP-S	
Title: P-P CONN. Wire Receptacle Solder Type (M)						
Drawn By:Storm.Li	SCALE	SHEET	REV.	DWG NO.: QC5666		TOLERANCE: .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°
Checked By:du	1:1	1/2	A			
Approved By:Tony	Thire angle Projection					
	General Dimesion Tolerance				Units mm	

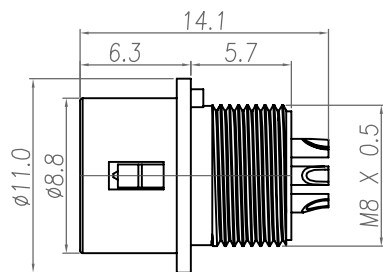


HOUSING + CONTACT + SHELL A

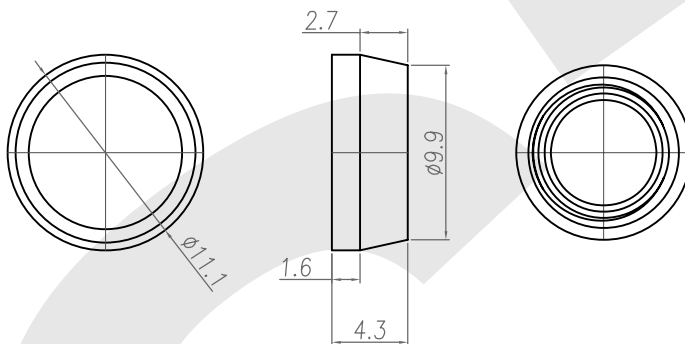


SHELL B

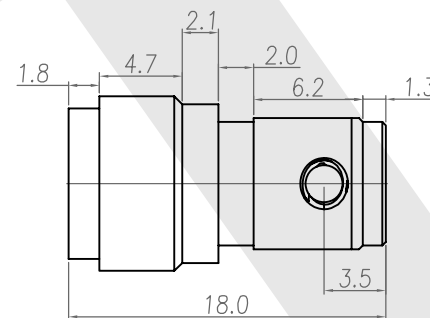


SHELL C



SCREW

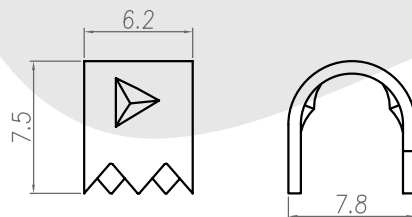

CRAMP

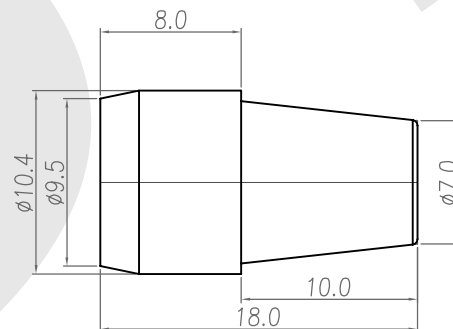

SR

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:			Part No.: ST3A-08WR-XXP-S		
	Title: P-P CONN. Wire Receptacle Solder Type (M)					
Drawn By: Storm.Li	SCALE	SHEET	REV.	DWG NO.:		TOLERANCE:
Checked By: du	1:1	2/2	A	QC5666		.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULAR ±1°
Approved By: Tony	Thire angle Projection				Units mm	
	General Dimesion Tolerance					

.x ±0.20
 .xx ±0.10
 .xxx ±0.05
 .xxxx ±0.03
 ANGULA ±1°