



| Part No.     | Wire range |                 | Material/<br>Finish | Thickness<br>mm | Insulation<br>D.D.(mm) | Reel<br>Pcs |
|--------------|------------|-----------------|---------------------|-----------------|------------------------|-------------|
|              | Awg#       | mm <sup>2</sup> |                     |                 |                        |             |
| WW130-M(F)T1 | 20-26      | 0.5-0.1         | Brass/Tin           | 0.25            | 2.7-1.3                | 7,000       |
| WW130-M(F)T2 | 16-20      | 1.3-0.5         | Brass/Tin           | 0.25            | 3.4-1.9                | 5,000       |

|                                   |                         |                           |                  |                                    |               |
|-----------------------------------|-------------------------|---------------------------|------------------|------------------------------------|---------------|
| <b>Rev</b>                        | <b>Description/Date</b> | <b>Drawn By: Storm.li</b> | <b>Customer:</b> | <b>Third angle projection</b>      | <b>Units:</b> |
| △                                 |                         | Checked By: Simmon        | Part No.:        |                                    | mm            |
| △                                 |                         | Approved By: Tony         | Title:           |                                    |               |
| SGS Report No.: KA/2005/40815/A-2 |                         | <b>Terminal</b>           |                  | <b>SOUTH SEA TERMINAL CO., LTD</b> |               |

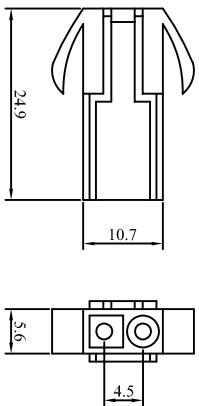


WW130-F02 (10A)

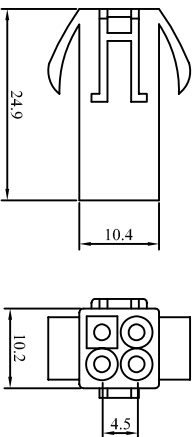


WW130-F04-1 (10A)


Material: Nylon 66 UL94V-0  
 Applicable panel thickness: 0.8 to 2.0 mm  
 Mate with: WW130-M Series housing  
 Current rating: 10A AC,DC Max  
 Voltage Rating: 300V AC,DC Max  
 Contact resistance: 10mΩ Max  
 Insulation resistance: 1000MΩ Min  
 Withstanding voltage : 1500V AC/Minute  
 Temperature range: -25° C to +85° C

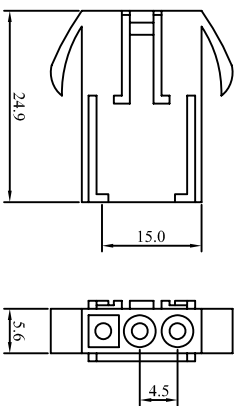


WW130-F03 (10A)

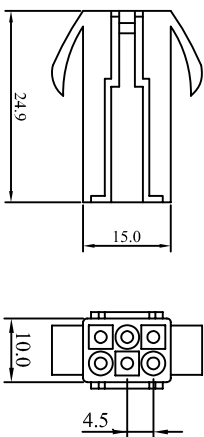


WW130-F06 (8A)

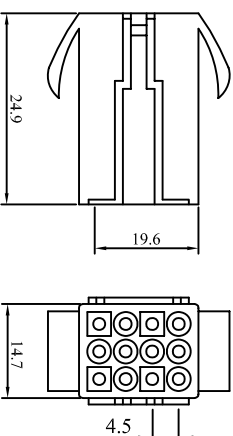


WW130-F12 (6A)

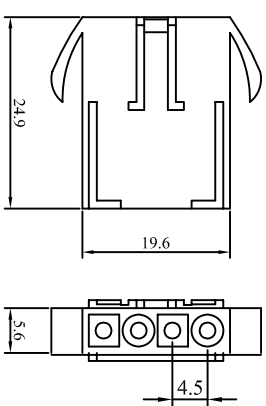

WW130-F04 (10A)

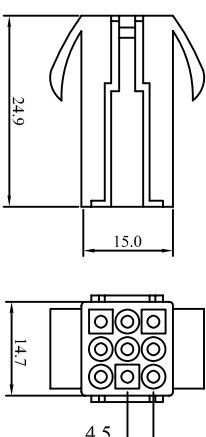

WW130-F09 (6A)

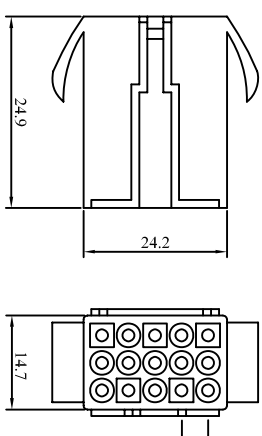

WW130-F15 (6A)

| Rev | Description/Date | Drawn By: Storm.li |
|-----|------------------|--------------------|
| △   |                  | Checked By: Simmon |
| △   |                  | Approved By: Tony  |

|           |                |
|-----------|----------------|
| Customer: |                |
| Part No.: | WW130-F Series |
| Title:    | Housing        |


|                        |           |
|------------------------|-----------|
| Third angle projection | Units: mm |
|------------------------|-----------|

|                             |           |           |             |
|-----------------------------|-----------|-----------|-------------|
| General Dimension Tolerance | X.X ±0.25 | X.XX ±0.1 | X.XXX ±0.08 |
|-----------------------------|-----------|-----------|-------------|


SGS Report No.: KA/2004/80788/A-2

**SOUTH SEA TERMINAL CO., LTD**


Large hole  
2.7/2501





WW130-M02 (10A)




WW130-M04-1 (10A)




WW130-M03 (10A)




WW130-M06 (8A)




Material: Nylon 66 UL94V-0  
 Applicable panel thickness: 0.8 to 2.0 mm  
 Mate with: WW130-F Series housing  
 Current rating: 10A AC,DC Max  
 Voltage Rating: 300V AC,DC Max  
 Contact resistance: 10mΩ Max  
 Insulation resistance: 1000MΩ Min  
 Withstanding voltage : 1500V AC/Minute  
 Temperature range: -25°C to +85°C

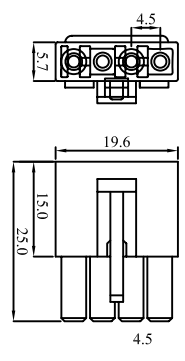



WW130-M04 (10A)





WW130-M09 (6A)



WW130-M12 (6A)




WW130-M15 (6A)






|                                   |                  |                    |                          |                                   |                                 |
|-----------------------------------|------------------|--------------------|--------------------------|-----------------------------------|---------------------------------|
| Rev                               | Description/Date | Drawn By: Storm.li | Customer:                | Third angle projection            | Units:<br>mm                    |
| △                                 |                  | Checked By: Simmon | Part No.: WW130-M Series | General Dimension Tolerance       | X.X ±0.25 X.XX ±0.1 X.XXX ±0.08 |
| △                                 |                  | Approved By: Tony  | Title: Housing           | <b>SOUTH SEA TERMINAL CO.,LTD</b> |                                 |
| SGS Report No.: KA/2004/80788/A-2 |                  |                    |                          |                                   |                                 |

# Location of Circuits

WW130-M

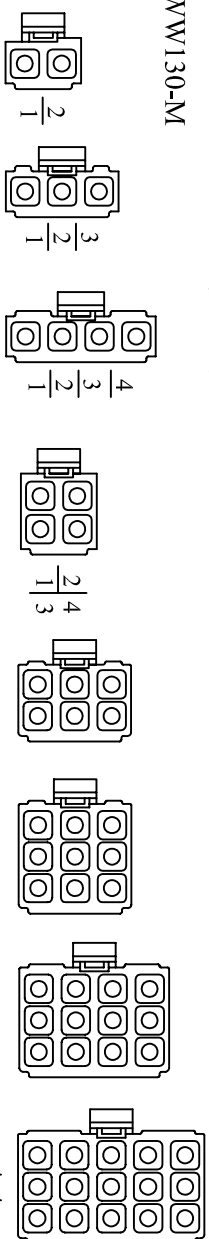


WW130-F

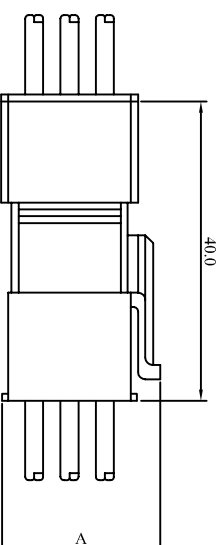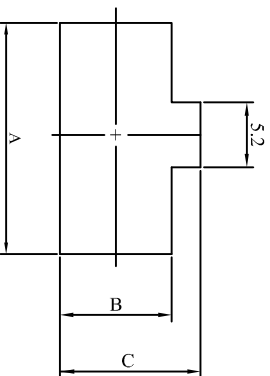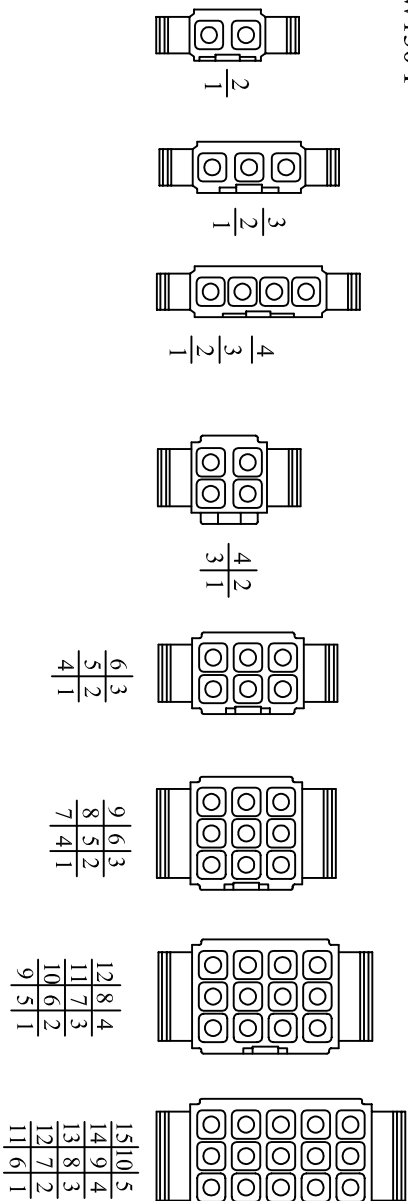

| Circuit | Dim/mm |      |      |
|---------|--------|------|------|
|         | A      | B    | C    |
| 2       | 15.0   | 6.0  | 6.85 |
| 3       | 19.7   | 6.0  | 6.85 |
| 4(1*4)  | 24.2   | 6.0  | 6.85 |
| 4(2*2)  | 15.6   | 10.6 | 11.6 |
| 6       | 19.7   | 10.2 | 11.1 |
| 9       | 19.7   | 14.8 | 15.7 |
| 12      | 24.2   | 14.8 | 15.7 |
| 15      | 28.7   | 14.8 | 15.7 |

Terminal remover

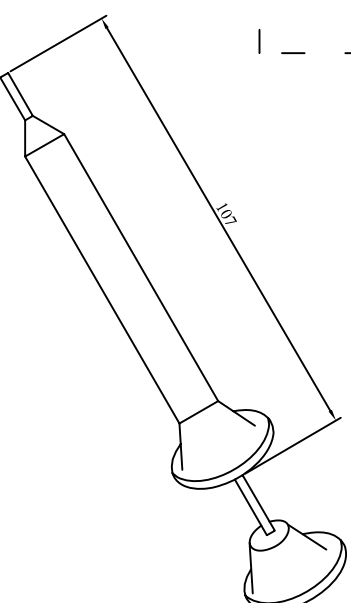

|     |                  |                    |
|-----|------------------|--------------------|
| Rev | Description/Date | Drawn By: Storm.li |
| △   |                  | Checked By: Simmon |
| △   |                  | Approved By: Tony  |

|           |                      |
|-----------|----------------------|
| Customer: | WW130-M&F            |
| Part No.: | Location of Circuits |

|                             |                                 |
|-----------------------------|---------------------------------|
| Third angle projection      | Units: mm                       |
| General Dimension Tolerance | X.X ±0.25 X.XX ±0.1 X.XXX ±0.08 |

SGS Report No.: KA/2004/80788/A-2

**SOUTH SEA TERMINAL CO., LTD**