









WW158A-F02E(5A/250V)

WW158A-F06E(5A/250V)





WW158A-F03E(5A/250V)

WW158A-F09E(5A/250V)



WW158A-F04E(5A/250V)

WW158A-F12E(5A/250V)



WW158A-F15E(5A/250V)

Material: Nylon 66 UL94V-2  
 Current rating: 6A AC, DC Max  
 Voltage Rating: 300V AC, DC Max  
 Contact resistance: 15mΩ Max  
 Insulation resistance: 1000MΩ Min  
 Withstanding voltage : 1500V AC/Minute  
 Temperature range: -25° C to +85° C  
 Applicable panel thickness: 2 mm max


Rev	Description/Date	Drawn By: Storm.li
△		Checked By: Simmon
△		Approved By: Tony

Customer:	
Part No.:	WW158A-F(E) Series
Title:	Housing


Third angle projection		Units: mm
General Dimension Tolerance	X.X ±0.25    X.XX ±0.1    X.XXX ±0.08	

SGS Report No.: KA/2004/80788/A-2

**SOUTH SEA TERMINAL CO., LTD**

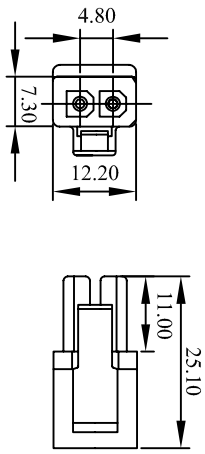


WW158A-M02(5A/250V)

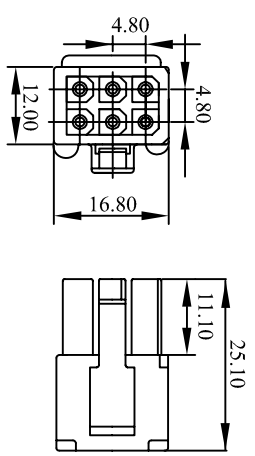


WW158A-M06(5A/250V)


Material: Nylon 66 UL94V-2  
 Current rating: 5A AC, DC Max  
 Voltage Rating: 250V AC, DC Max  
 Contact resistance: 15mΩ Max  
 Insulation resistance: 1000MΩ Min  
 Withstanding voltage : 1500V AC/Minute  
 Temperature range: -25° C to +85° C  
 Applicable panel thickness: 2 mm max

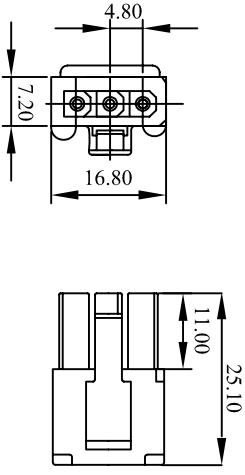


WW158A-M03(5A/250V)

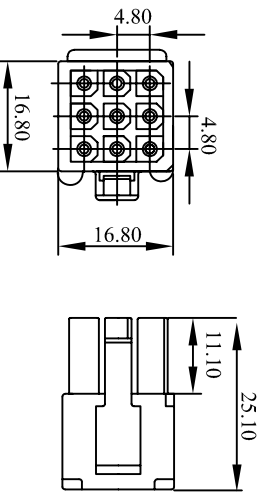


WW158A-M09(5A/250V)

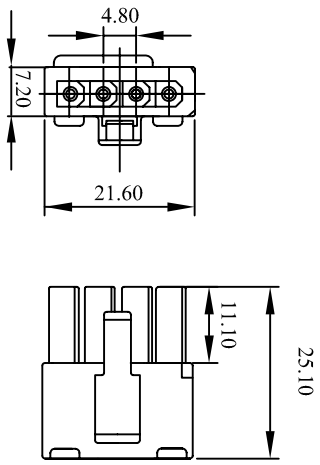

WW158A-M04(5A/250V)

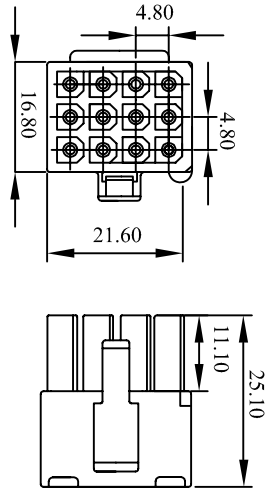

WW158A-M12(5A/250V)

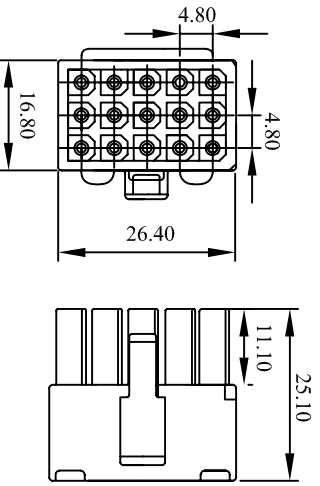

WW158A-M15(5A/250V)

Rev	Description/Date	Drawn By: Storm.li
△		Checked By: Simmon
△		Approved By: Tony

Customer:	
Part No.:	WW158A-M Series
Title:	Housing

Third angle projection	Units: mm
General Dimension Tolerance	X.XX ±0.25 X.XXX ±0.1 X.XXX ±0.08

SGS Report No.: KA/2004/80788/A-2

**SOUTH SEA TERMINAL CO., LTD**