


Rev	Revisions	Rev.Drawn	Date
A		Du	25.11.2008

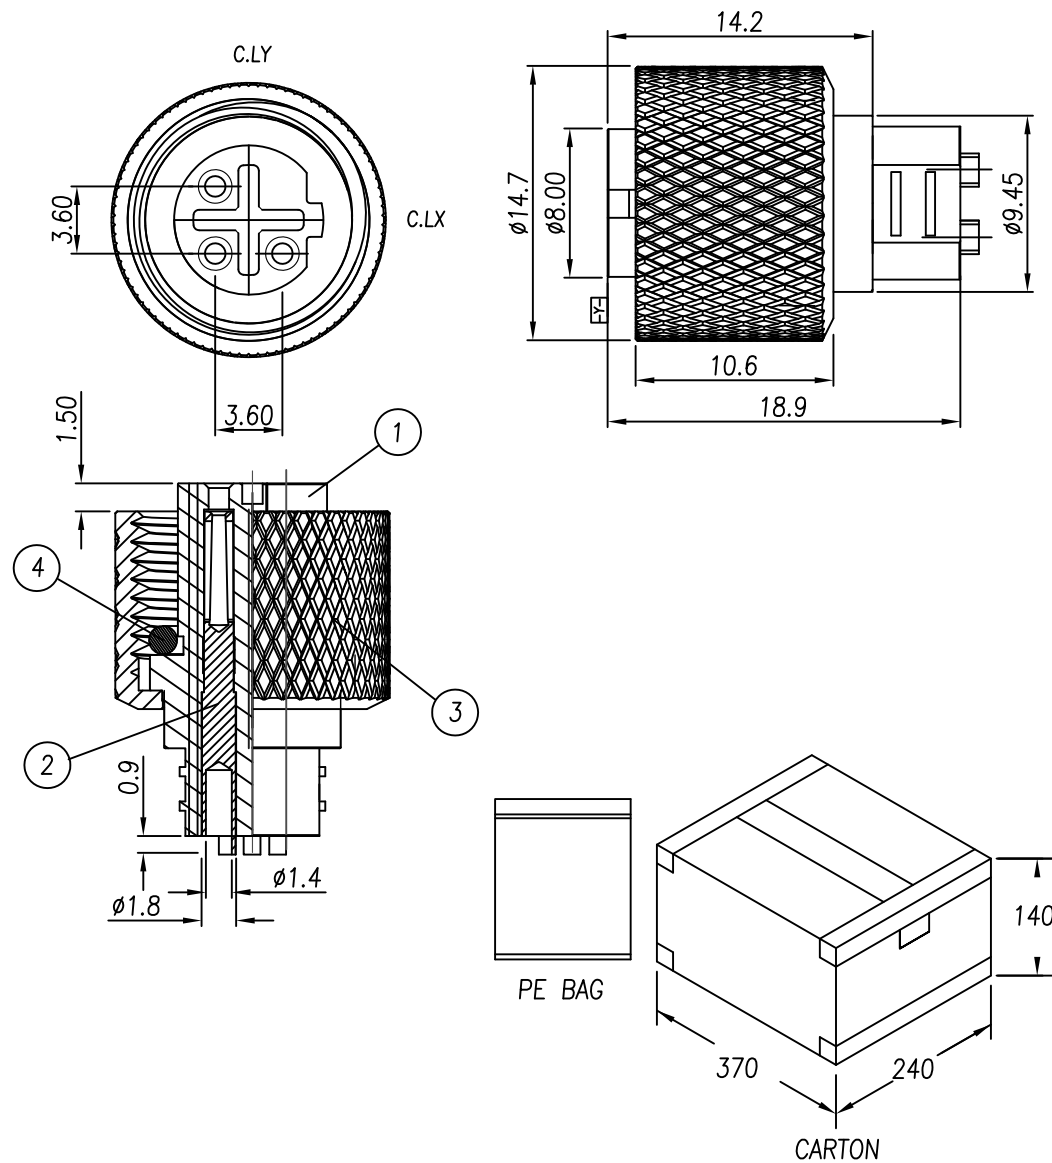

NOTE:

1.ELECTRICAL PROPERTIES:

- 1-1.RATING:2A.
- 1-2.INSULATION RESISTANCE:1000M Ohm MIN.
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE:AC 500V/1 MINUTE.

2.MATERIAL:

- 2-1.PIN:BRASS(C3604).
- 2-2.HOUSING: PBT+GF ,UL 94V-0.
- 2-3.NUT:BRASS(C3604)
- 2-4.O-RING:NBR.

3.PLATING:

- 3-1.TERMINAL: GOLD PLATING 10u" OVER ALL,
UNDERPLATED NICKEL OVER ALL
- 3-2.NUT:NICKEL OVER ALL

4.PACKAGE:

- 4-1.PER BAG 100/PCS
- 4-2.PER LAYER 2 LOTS PE BAG.
- 4-3.PER CARTON 4 LAYERS .
- 4-5.PER CARTON Q'TY:4X2X100;800PCS.

SST SOUTH SEA TERMINAL CO.,LTD

SGS Report No.:	Customer:	Part No.:
		12F3P-W-B-10.6-P-2-G10-B-N
	Title: M12 FEMALE SOLDER TYPE for CABLE (B CODE)	
Drawn By: Storm.Li	SCALE	SHEET
Checked By: du	1:1	1/1
Approved By: Tony	Thire angle Projection	REV. A
	General Dimesion Tolerance	DWG NO.: SST-081125-01
		TOLERANCE:
		X. ±2MM
		.X ±0.25MM
		.XX ±0.1MM
		.XXX±0.1MM